
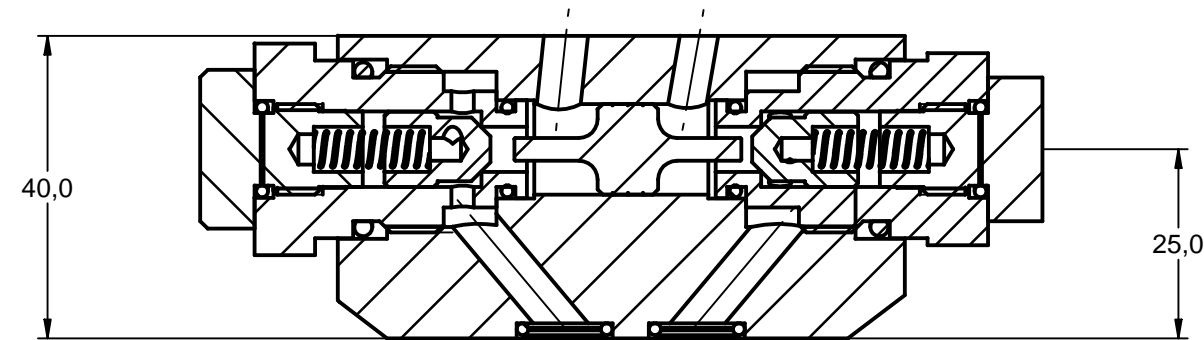
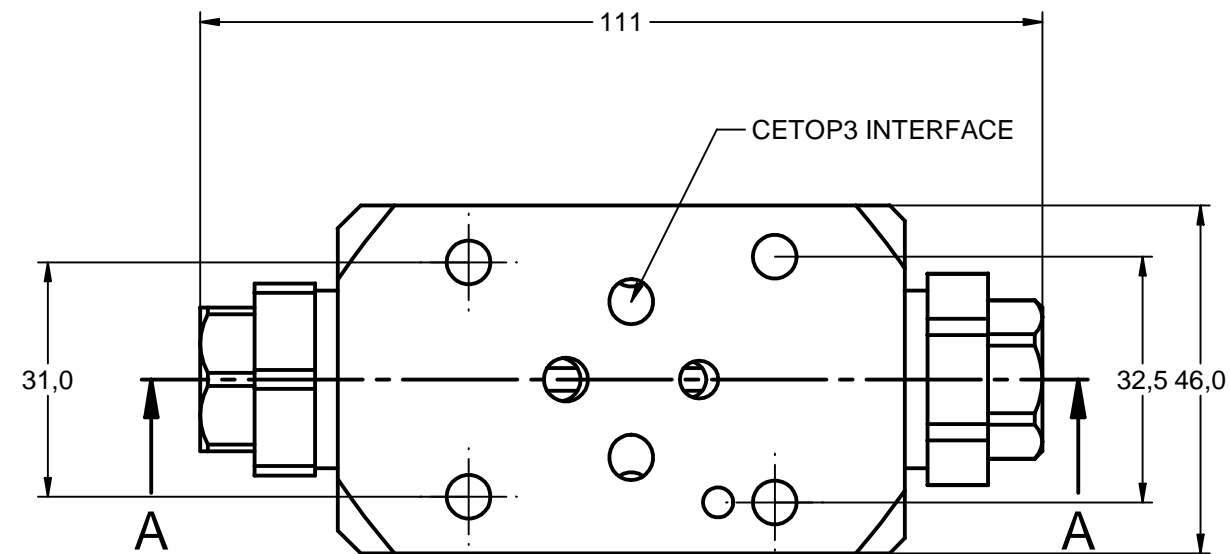


FLUID POWER SYMBOL

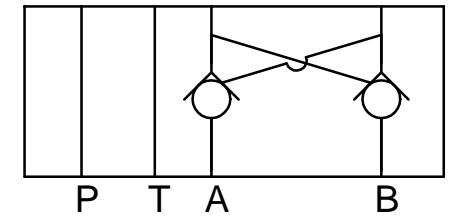

SECTION A-A

VALVE SPECIFICATION

1. THIS VALVE CONSISTS OF A VALVE AND A SHUTTLE
2. SERVICE PRESSURE IS 300 BAR MAX
3. FLUID MEDIUM IS MINERAL OIL
4. OPERATING TEMP 80° MAX
5. NITRILS SEALS ARE STANDARD
6. PILOT RATION IS 3
7. CRACKING PRESSURE IS 2 BAR
8. MAX FLOW IS 25 LPM
9. MOUNTING IS CETOP 3

MODEL CODE DGMPC3 ABK BAK 30


VALVE WEIGHT KG

Tucson Hydrocontrols

C1B 246/5 GIDC Estate, Umbergaon
Gujarat 39 6171

DRAWN PVD CHKD RJPD
APRVD PVD DATE

**DATA SHEET
DGMPC3**



SCALE

DATA SHEET NO **050 405**

TS011

